POND PRO

North America's Pond Superstore

Born out of Ackenberry Trout Farm, Pond Pro is a family owned business. We have grown from a small pond supply store to a Canadian leader in pond supply, aeration systems, water fountains, and industrial water needs.

Be it designing unique pond maintenance guides for a customer, offering advice on marketing products, or providing solutions for large scale water systems,

OUR TEAM IS HERE TO HELP!



- 1-855-414-7663
- X SALES@PONDPRO.CA
- **Q** CAMROSE, AB
- **PONDPRO.CA**



CAN-AIR KOI 2 AERATION SYSTEM

OWNERS MANUAL

- 1-855-414-7663
- **X** SALES@PONDPRO.CA
- **Q** CAMROSE, AB
- **PONDPRO.CA**



INCLUDED IN THIS KIT

- [1] Jebao PA-60 Linear Air Compressor
- [2] Eco Diffusers
- [2] 25' 3/8" I.D. Sinking Airline
- [4] Hose Clamps
- [1] 2-way Manifold

The Can-Air Koi 2 aeration system is designed for ponds with a depth less than or equal to 5'.

Diffusers need to be placed at equal depths.

TO SET UP SYSTEM

- Remove the diffusers and all other components from the box. The diffusers' check valve and hose barb are pointed inwards for shipping purposes. Rotate the check valve and barb to point outwards.
- Connect one roll of 25' sinking line to the hose barbs on each diffuser. Use a hose clamp to secure the barb in place. Do not overtighten clamp.
- Attach the other end of the sinking line to the hose barb on the manifold with a hose clamp. Do not over-tighten clamp.
- Place the diffusers in the desired location. This can be done with a boat or by tossing the diffusers into the pond. The diffusers are designed to sink and self-right. Optional: a rope can be tied to the diffusers for easy retrival.


COMPRESSOR MOUNTING

Compressors must be protected from weather and kept in a well ventilated/cool area to prevent overheating. If you purchased a compressor cabinet, follow the mounting instructions below.

Your cabinet is equipped with ventilation holes. Keep ventilation holes unobstructed.



The air pump comes equipped with anti-vibration rubber feet that do not need to be bolted down.

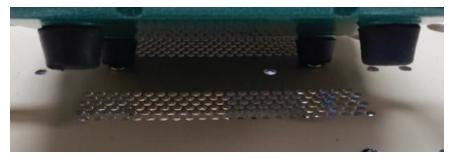

Guide the sinking airline from the manifold through the holes to outside of the cabinet.

Your cabinet is now ready to mount on a post. The cabinet must be mounted at least 4' off the ground.